

**HIGH PRESSURE
ACCESS DOOR
FOR
SHEET METAL**

- Low leakage
- Quick installation
- Safe entry and exit

Extremely Low Leakage	
Operating Pressure	Leakage Rate* All door sizes
6" wg	less than .10 cfm
10" wg	less than .25 cfm
20" wg	less than .50 cfm

*Sheet metal access door. Tested by an independent ADC Certified Laboratory.

Nominal Door Size - A	Min. Hole Cut Size*
8"	7 1/8"
10"	9 1/8"
12"	11 1/8"
18"	17 1/8"
24"	23 1/8"


*Tolerance = + 1/8"



**ACCESS DOORS MODEL ADH/ADC
HINGED OR DOUBLE
CAM LOCK**

Standard Specifications	
Frame	22 ga. gal. steel
Door	24 ga. gal. steel
Insulation	1" thick fiberglass
Gaskets	1/4" X 1/2" polyurethane foam
Latches	Zinc plated sash type Zinc plated steel strikes

Stock Doors		
6 X 6	8 X 8	10 X 10
12 X 12	14 X 14	16 X 16
18 X 18	24 X 24	

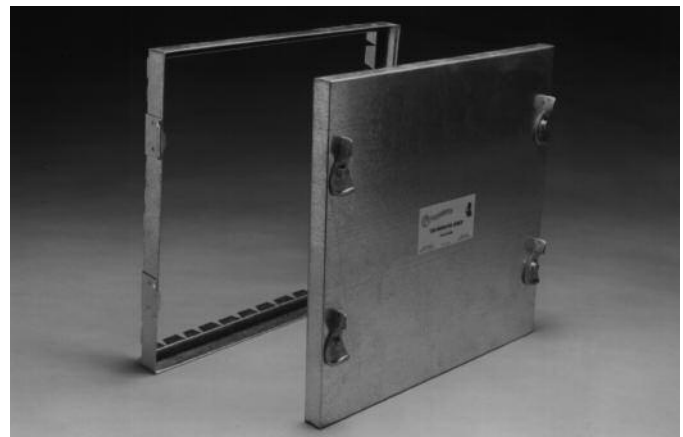

- Model ADC, double cam doors, in sizes larger than 14" X 14" have four cam latches
- Model ADH, hinged doors, in sizes larger than 14" X 14" have two cam latches
- Frame sizes shown are nominal, actual opening sizes are 1 1/4" smaller